

Fluorosint® PTFE Family of Advanced Fluoropolymer Materials



Alro Plastics

FLUROSINT ENHANCED PTFE MATERIALS

See How These Materials Stack Up In Your Application

Quadrant developed the Fluorosint range of enhanced PTFE materials to fill the performance gaps where unfilled and low-tech, filled PTFE based polymers underperform. Each Fluorosint material was specifically developed to excel in demanding bearing and seal applications. While each of these materials possess the chemical resistance and compliance of PTFE, each material offers some special benefits that give the designer clear performance advantages.

Higher pressure seals and wear parts where precision is critical.



Fluorosint® 500

- Outstanding dimensional stability - approximating aluminum
- Low deformation under load

Lower pressure seats and seals where virgin PTFE fails and FDA compliance may be required.



Fluorosint® 207

- FDA compliant
- Very good wear resistance
- Very low coefficient of friction

High performance bearings, bushings and seals where higher loads and minimal wear are required.



Fluorosint® HPV

- FDA compliant
- Excellent wear resistance
- Unmatched bearing performance

Extreme service seals and wear parts at elevated temperature where strength and stability are critical.



Fluorosint® MT-01

- Excellent resistance to deformation
- Good wear resistance
- Very dimensionally stable

TABLE OF CONTENTS

Fluorosint® 500 Enhanced PTFE	3
Fluorosint® 207 Enhanced, FDA-Compliant PTFE	4
Fluorosint® HPV Wear Resistant, FDA-Compliant PTFE	5
Fluorosint® MT-01 Ultra-High Performance, Enhanced PTFE	6
Physical Property Data	7



FLUOROSINT® 500

Exceptional Dimensional Stability for Precise Tolerance Control

Key Benefits

Fluorosint 500 Enhanced PTFE offers an ideal combination of stability and wear-resistance for sealing applications where tight dimensional control is required. Fluorosint 500 also greatly reduces the risk of a catastrophic system failure by becoming a sacrificial wear surface. With a deformation under load 9 times lower than virgin PTFE, Fluorosint 500 allows designers to greatly improve the efficiency of systems without sacrificing the wear resistance and forgiving benefits of PTFE. The synthetic mica developed and manufactured by Quadrant delivers tolerance performance approximating that of aluminum.

Common Applications

- Split and one-piece seals
- Valve seats
- Shrouds
- Slide bearings
- Wear strips
- Sacrificial, abradable seals
- Thrust washers

Light Tan / Grey





APPLICATION EXAMPLE

Fluorosint 500 has been used very successfully as a replacement for metal/aluminum seals and shrouds in compressors. In addition to the security a sacrificial part provides the system, Fluorosint 500 allows the introduction of abradable sealing technology where mating parts are allowed to "cut" their own running clearance and thus permitting significant gains in efficiency.

Fluorosint
500

Product
Overview

3

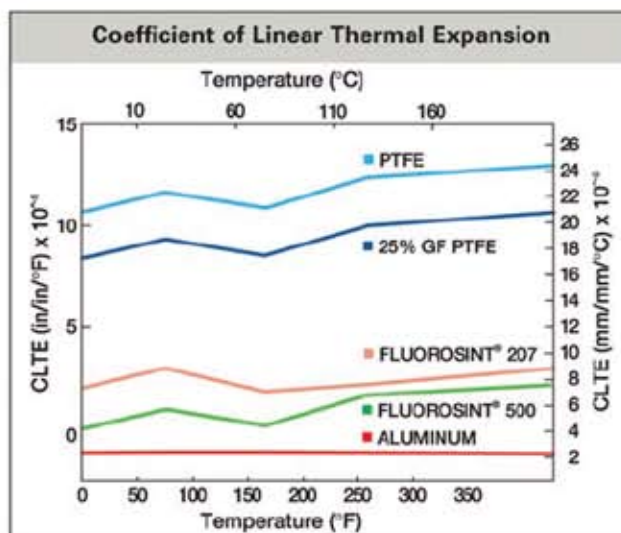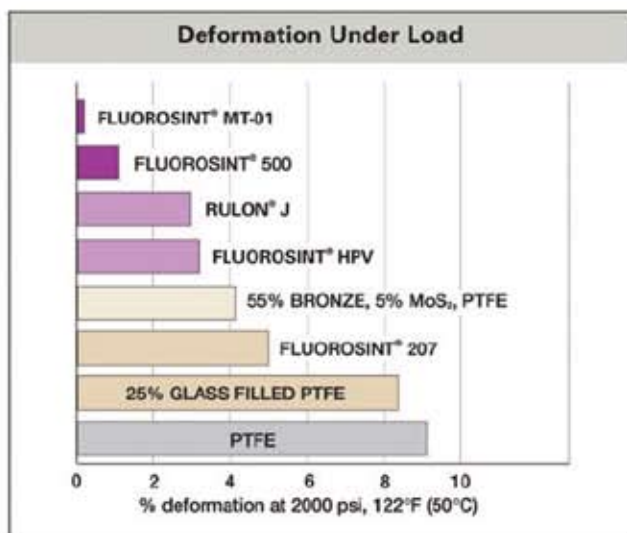



FLUOROSINT® 207

Lowest Coefficient of Friction of Fluorosint® Grades

Key Benefits

FDA compliant Fluorosint 207 Enhanced PTFE is a significant performance upgrade for any designer using PTFE for applications where temperature resistance, chemical resistance and FDA compliance are all important. Fluorosint 207 lasts far longer than unfilled PTFE in wear applications and has an extremely low coefficient of friction. Fluorosint 207 works well against most mating surfaces.

Common Applications

- Seals
- Mixers
- Pumps
- Appliances
- Bearings
- Valve seats

APPLICATION EXAMPLE

Fluorosint 207 replaces unfilled PTFE and low-tech, filled PTFE's in wear and seal applications where either stability or wear resistance are causing failures. A commercial beverage filling system replaced virgin PTFE seals with Fluorosint 207 and improved fill accuracy associated with leaks caused by failed seals.


White / Light Grey



**FDA
Compliant**



Coefficient of Friction, Dynamic

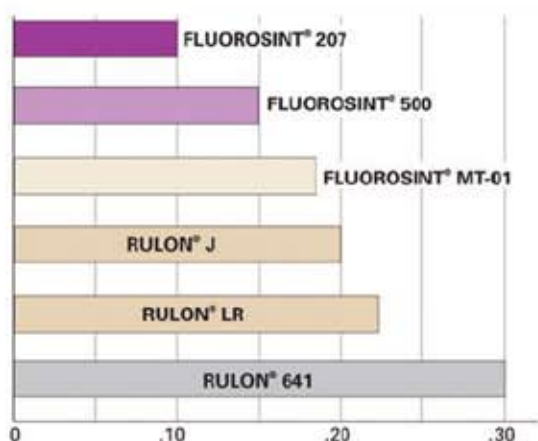



FLUOROSINT® HPV

Most Wear Resistant Fluorosint Grade - Outlasts Low-tech PTFE Based Materials

Key Benefits

FDA compliant Fluorosint HPV is a high performance bearing grade of Fluorosint - optimized for high PV and very low "K", or wear factor. Fluorosint HPV was developed for bearing applications where other, low-tech PTFE formulations exhibit premature wear or simply cannot perform. FDA compliance gives food and pharmaceutical equipment manufacturers new design options and all benefit from its excellent load bearing and wear characteristics.

Common Applications

- Bearings
- Commercial food equipment
- Wear guides
- High performance seals
- Thrust washers

APPLICATION EXAMPLE

Fluorosint HPV was specified by a manufacturer of commercial sausage production equipment as a replacement for a low-tech filled PTFE material. The old material would wear quickly and not properly stretch the product during filling. The premature wear caused tears in the product and required frequent replacement. An additional benefit of Fluorosint HPV – improved dimensional stability – allowed designers to remove a press fit metal part that was required to compensate for the low-tech material's lack of dimensional control.

Light Tan / Grey



FDA
Compliant




Fluorosint
HPV

Product
Overview

5


Limiting PV (Higher is Better)

(4:1 Safety Factor Applied)

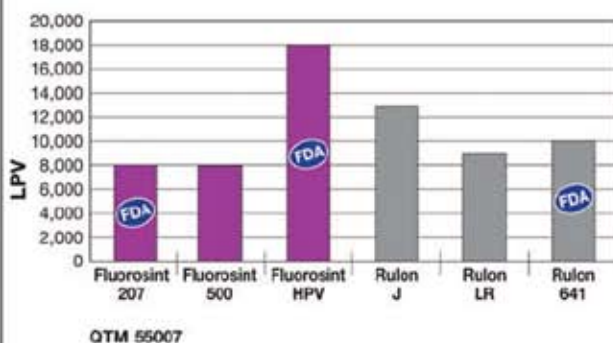

Relative Wear Resistance (Lower is Better)

("k" factor)

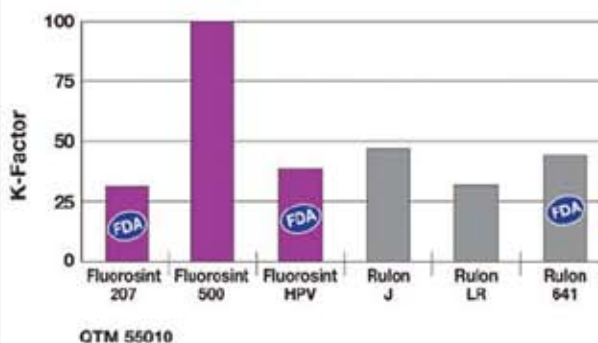



FLUOROSINT® MT-01

Ultra-High Performance Grade For Stability At Elevated Temperature

Key Benefits

Fluorosint MT-01 is an extreme service grade developed specifically for applications where the benefits of PTFE-based materials also require strength, stiffness and stability. Fluorosint MT-01 delivers high mechanical performance at elevated temperature and as a result is often specified in seat, seal and wear applications where extreme conditions are present.


Common Applications

- High temperature seals
- Linear guides
- Wear bands
- Ovens and dryers


APPLICATION EXAMPLE

Fluorosint MT-01 is widely specified in chemical processing equipment like the aggressive environment present during sour gas processing. Fluorosint MT-01 extends the temperature envelope of PTFE and provides remarkable stability for applications that see extremes. Seals, replaced monthly in oil recovery equipment have been replaced with Fluorosint MT-01 and now outlast other components.


Dark Grey

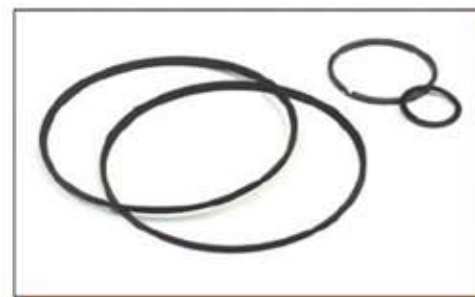

Deformation Under Load

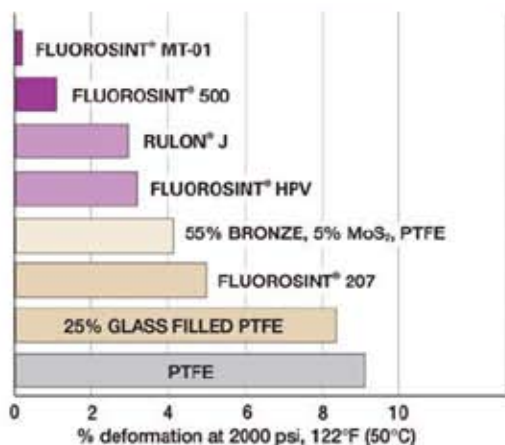

Competitive Material Comparison vs. Other Filled PTFE's

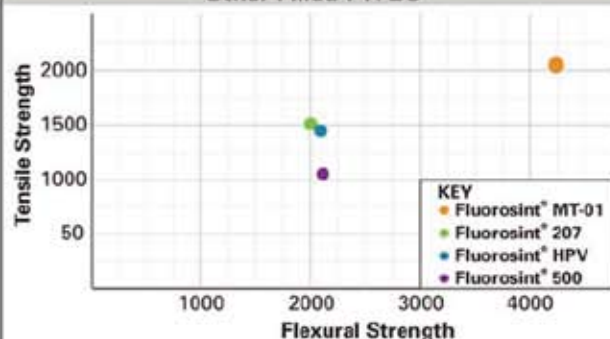

PHYSICAL PROPERTY DATA

	Properties	Test Method	Fluorosint 500 Mica Filled PTFE	Fluorosint 207 Mica Filled PTFE	Fluorosint HPV Mica Filled PTFE	Fluorosint MT-01 Enhanced PTFE
MECHANICAL	1 Specific Gravity, 73°F.	D792	2.32	2.3	2.06	2.27
	2 Tensile Strength, 73°F.	D638	1,100	1,500	1,450	2,100
	3 Tensile Modulus of Elasticity, 73°F.	D638	300,000	250,000	210,000	326,000
	4 Tensile Elongation (at break), 73°F.	D638	30	50	90	40
	5 Flexural Strength, 73°F.	D790	2,200	2,000	2,500	4,000
	6 Flexural Modulus of Elasticity, 73°F.	D790	500,000	350,000	165,000	488,000
	7 Shear Strength, 73°F.	D732	2,100	1,700	2,500	2,600
	8 Compressive Strength, 10% Deformation, 73°F.	D695	4,000	3,800	3,000	3,400
	9 Compressive Modulus of Elasticity, 73°F.	D695	250,000	225,000	110,000	250,000
	10 Deformation Under Load, % def @ 2,000 PSI, 122°F (50°C)	-	1.1%	5.0%	3.2%	0.2%
	11 Hardness, Rockwell, Scale as noted, 73°F.	D785	R55	R50	R44	R74
	12 Hardness, Durometer, Shore "D" Scale, 73°F.	D2240	D70	D65	D64	D75
	13 Izod Impact (notched), 73°F., ft. lb./in. of notch	D256 Type "A"	0.9	1	1.8	0.8
	14 Coefficient of Friction (Dry vs. Steel) Dynamic	QTM55007	0.15	0.1	0.15	0.18
	15 Limiting PV (with 4:1 safety factor applied)	QTM55007	8,000	8,000	20,000	4,500
	16 Wear Factor "k" x 10 ⁻¹⁰	QTM55010	600	30	38	200
THERMAL	17 Coefficient of Linear Thermal Expansion (-40°F to 300°F)	E-831 (TMA)	2.5 x 10 ⁻⁵	5.7 x 10 ⁻⁵	4.9 x 10 ⁻⁵	3.0 x 10 ⁻⁵
	18 Heat Deflection Temperature 264 psi	D648	270	210	180	200
	19 Tg-Glass transition (amorphous)	D3418	N/A	N/A	N/A	N/A
	20 Melting Point (crystalline) peak	D3418	621	621	621	-
	21 Continuous Service Temperature in Air (Max.) (1)	-	500	500	500	600
	22 Thermal Conductivity	F433	5.3	-	-	-
ELECTRICAL	23 Dielectric Strength, Short Term	D149	275	200	-	-
	24 Surface Resistivity	EOS/ESD S 11.11	>10 ¹³	>10 ¹²	>10 ¹³	<10 ⁸
	25 Dielectric Constant, 10 ⁶ Hz	D150	2.85	2.65	-	-
	26 Dissipation Factor, 10 ⁶ Hz	D150	0.008	0.008	-	-
	27 Flammability @ 3.1 mm (1/8 in.) (5)	UL94	V-0	V-0	V-0	V-0
CHEMICAL (3)	28 Water Absorption Immersion, 24 Hours	D570 (2)	0.1	0.03	0.15	0.1
	29 Water Absorption Immersion, Saturation	D570 (2)	3	0.2	0.43	-
	30 Acids, Weak, acetic, dilute hydrochloric or sulfuric acid	-	A	A	A	A
	31 Acids, Strong, conc. hydrochloric or sulfuric acid	-	A	A	A	A
	32 Alkalies, Weak, dilute ammonia or sodium hydroxide	-	A	A	A	A
	33 Alkalies, Strong, strong ammonia or sodium hydroxide	-	U	U	U	A
	34 Hydrocarbons-Aromatic, benzene, toluene	-	A	A	A	A
	35 Hydrocarbons-Aliphatic, gasoline, hexane, grease	-	A	A	A	A
	36 Ketones, esters, acetone, methyl ethyl ketone	-	A	A	A	A
	37 Ethers, diethyl ether, tetrahydrofuran	-	A	A	A	A
	38 Chlorinated Solvents, methylene chloride, chloroform	-	A	A	A	A
	39 Alcohols, methanol, ethanol, anti-freeze	-	A	A	A	A
OTHER	40 Continuous Sunlight	-	A	A	A	A
	41 FDA Compliance	-	N	Y	Y	N
	42 Relative Cost (4)	-	\$\$	\$\$\$	\$\$\$	\$\$\$\$
	43 Relative Machinability (1-10, 1=Easier to Machine)	-	2	2	2	5

Fluorosint

Physical
Properties



Alro Plastics

Clearwater

10585 47th Street N.
Clearwater, FL 33762
Local: (727) 573-1480
Fax: (727) 573-1632
Toll Free: (877) 968-9980

Louisville

5620 Shepherdsville Rd.
Louisville, KY 40228
Local: (502) 968-9980
Fax: (502) 968-5530
Toll Free: (877) 968-9980

Grand Rapids

4150 Broadmoor SE
Grand Rapids, MI 49512
Local: (616) 656-2820
Fax: (616) 656-2828
Toll Free: (888) 877-2576

Jackson

2218 Enterprise
Jackson, MI 49203
Local: (517) 787-5500
Fax: (517) 787-6380
Toll Free: (800) 877-2576

Livonia

34401 Schoolcraft Rd.
Livonia, MI 48150
Fax: (517) 787-6380
Toll Free: (800) 877-2576



Learn more online at
www.quadrantplastics.com

Quadrant has extensive product and machining resources available online. Our website is a portal to a wealth of technical data and the easiest way to engage our application specialists. Our team stands ready to help offer solutions to your toughest problems.

Quadrant Engineering Plastic Products Worldwide

EUROPE

Hardstrasse 5
CH-5600 Lenzburg
Tel +41 (0) 62 8858259
Fax +41 (0) 62 8858401
e-mail: info@qplas.com

NORTH AMERICA

2120 Fairmont Avenue
PO Box 14235 - Reading, PA 19612-4235
Tel 800 366 0300 / +1 610 320 6600
Fax 800 366 0301 / +1 610 320 6868
e-mail: americas.epp@qplas.com

ASIA-PACIFIC

60 Ha Mei San Tsuen, Ping Shan
YUEN LONG,
N.T. Hong Kong
Tel +852 (0) 24702683
Fax +852 (0) 24789966
e-mail: asia.epp@qplas.com

All statements, technical information and recommendations contained in this publication are presented in good faith, based upon tests believed to be reliable and practical field experience. The reader is cautioned, however, that Quadrant Engineering Plastic Products does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of Quadrant's products in any given application.

Acetron, Durepin, Duratron, Ertal, Ertacetal, Ertalene, Ertalon, Ertalyle, Extreme Materials, Fluorosint, Kestron, MC, Monocast, Novatron, Nylatron, Polypenco, Proteus, Saralite, Semitron, Symail, Techtron, TIVAR, Ultravear and Vibratuf are registered trademarks of the Quadrant group of companies.

*Classix is a registered trademark of Invibio Ltd. Corp.

*Rulon is a registered trademark of Saint Gobain Performance Plastics

*Teflon is a registered trademark of Solvay Advanced Polymers

*Vespeal is a registered trademark of E.I. DuPont

This guide was created by Quadrant Engineering Plastic Products.
Design and content are protected by copyright law.
Copyright © 2010 The Quadrant group of companies. All rights reserved.



member
iapd

international association
of plastics distribution